




GSL
power

DIMMER RACKS

“..Ready when you are”

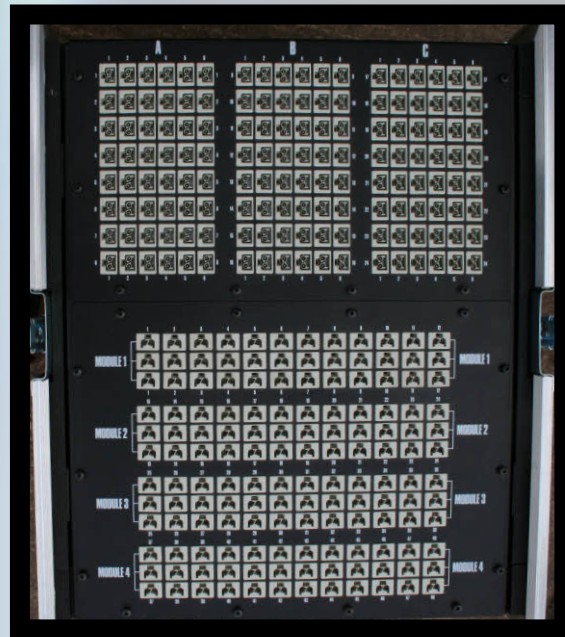

48 way Top Patch - Designed for the Dimmer of your choice

Veam Powerlock In/Out

Earth leakage protection - ELDC facility, which allows modules to be disabled individually and when powered down / up again it resets all modules back to enable (On)

Auxiliary Facility

- 1 x 32Amp Cee-form protected by 3 pole D curve ABB breaker**
- 3 x 16Amp Cee-form protected by 3 x SP C Curve ABB breakers**
- All the AUX is protected by 63Amp 30MA 4 pole RCD**

Outputs: Socapex x 24
Wieland Male 2 pin x 144

Inputs: Wieland Female 2 pin x 72
X3 per Dimmer Channel

Modules are powered by 4 pole D curve 63Amp ABB breaker with trip add-on

Quality Equipment for the entertainment industry

www.gslpower.com



DIMMER RACKS

“..Ready when you are”



24 Way Any Dimmer Back Patch

63A / 125A Cee-form Input

Modules powered by 32A / 63A ABB breakers

Earth leakage protection with 63A 30mA RCD

Auxiliary Facility

1 x 32A Cee-form protected by 3 pole D curve ABB breaker

9x 2 Pin 16A Weiland - 3 per phase protected by 3x 16A C curve ABB breakers

1x 16A Cee-form protected by one of the 16A ABB breakers stated above

Outputs: Socapex x 12
Weiland Male 2 Pin 16A x 72

Inputs: Weiland Female 2 Pin 16A x 72
X3 per Dimmer Channel

Quality Equipment for the entertainment industry
www.gslpower.com